

3M-Matic™ Case Sealers



7000a Pro



7000r Pro



8000a

Reliability plus Speed

**New
Expanded
Capabilities**

Increased Throughput for Cost Savings

Building on 45 years of case sealing innovation, 3M engineers designed this new line of case sealers to help companies save money while improving their packaging throughput and providing a quality seal.

These new 3M-Matic™ Case Sealers meet the current market needs for greater flexibility and broader capabilities.

7000a Pro

Effectively seals similar size boxes; manually adjustable belts accommodate different box sizes. Seals up to 40 cases per minute.

7000r Pro

Automatically adjusts to a box's dimensions. Seals up to 24 cases per minute.

8000a

Equipped with a side belt drive system; most suitable for narrow boxes. Seals up to 40 cases per minute.




Consistent. Reliable. Tough.

3M-Matic™ Case Sealer*		Length Inches (mm)	Width Inches (mm)	Height		
				Standard Position	Standard Position	Offset Position**
				Standard Tape Leg Length	Short Tape Leg Length	Short Tape Leg Length
7000a Pro, 7000a3 Pro Adjustable	Minimum	6 (152)	6.5 (165)	4.25 (108)	3.75 (95)	2 (51)
	Maximum	No Limit	26 (660)	28 (711)	27.5 (700)	25.75 (654)
7000r Pro, 7000r3 Pro Random	Minimum	6 (152)	6.5 (165)	4.375 (111)	–	2 (51)
	Maximum	No Limit	26.5 (673)	26 (660)	–	23 (584)
8000a Side belt	Minimum	6 (152)	4.5 (114)	4.25 (108)	3.75 (95)	–
	Maximum	No Limit	21.5 (546)	28 (711)	27.5 (699)	–
8000a3 Side belt	Minimum	6 (152)	5.5 (140)	4.25 (108)	3.75 (95)	–
	Maximum	No Limit	21.5 (546)	28 (711)	27.5 (699)	–

* The "a and r" models come with a 2" 3M™ AccuGlide™ 3 Taping Head.
The "a3 and r3" models come with a 3" 3M™ AccuGlide™ 3 Taping Head.

** Requires Small Box Kit, 78 ft/min belt speed and 3M™ AccuGlide™ LHB Taping Heads.

For greater flexibility in packaging operations, these new case sealers accommodate two- and three-inch tape.

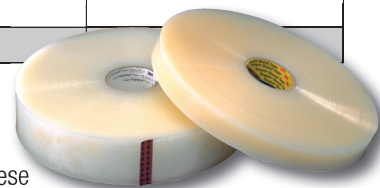

3M TOTAL PACKAGING SYSTEM—Your single vendor solution

3M Tape • Full line of Case Sealers • Replacement Parts • On-call Technical Service Support

View videos and details on the full line of packaging solutions at:

3M.com/3Mmatic

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. **Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M

Industrial Adhesives and Tapes Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
800-362-3550 . 877-369-2923 (Fax)
www.3m.com/3Mmatic

3M, AccuGlide and 3M-Matic
are trademarks of 3M Company.
© 2014, 3M. All rights reserved.
70-0710-0433-0