

CLAMCO

C O R P O R A T I O N

Your one source for packaging systems



6022 HEAT SHRINK TUNNEL

**NEW 6022 IS BUILT FOR
PERFORMANCE, FLEXIBILITY—
AND VALUE!**

The Clamco 6022 offers great performance in a smaller-size chamber design for medium and intermediate applications. Features include 9,000 watts of heating power, 3/4-horsepower blower, and much more.

The diverse 6022 is ideal for use with automatic and semi-automatic sealers—and it's value priced for excellent sealer-tunnel combo affordability.

CLAMCO'S 6022 HEAT SHRINK TUNNEL

An exceptional value for your operations!

Standard Features:

- Chamber opening: 22"W x 34"L x 10"H
- 9,000 watts of heating power
- Variable-speed, live/dead roller conveyor
- Air-cooled controls
- Fully insulated heat chamber
- Precision digital temperature control
- Automatic cool down
- 360° air flow heat-transfer system with 3/4 HP blower
- Double entry and exit curtains for greater efficiency
- Adjustable levelers
- USDA approved
- Made in U.S.A.
- One-year limited warranty

Specifications:

- 230V, single phase, 48 amps
- Overall dimensions: 60"L x 38"W x 63"H


Options:

- 1" roller spacing
- Casters
- Integrated controls with 6700 Series Automatic L-Sealers
- Mesh belt conveyor



MODEL 6022 HEAT SHRINK TUNNEL

Ideal for use with Clamco 6700 automatic L-bar sealer (shown below-left) and many other automatic and semi-automatic models.

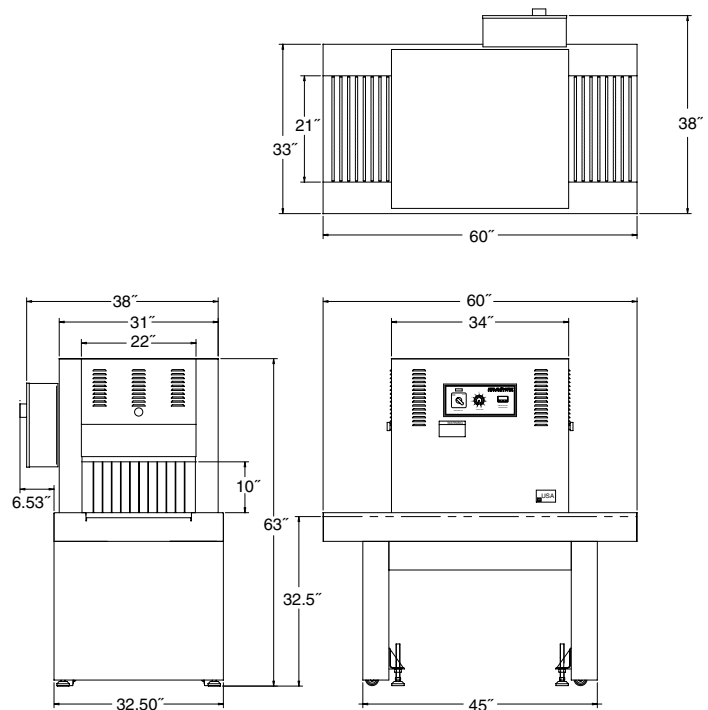

CLAMCO
CORPORATION

Your one source for packaging systems

12900 Plaza Drive, Cleveland, OH 44130-1079

1-800-299-1655 216-267-1911

Fax: 216-267-8713

www.clamcocorp.com

e-mail: info@clamcocorp.com

Distributor:

Specifications and design features subject to change without notice.
Some photos may show accessories not part of basic machine.