

MS2B2T

Manual Sidedrive 2 Bottom and 2 Top Carton Sealer

The BestPack® MS2B2T Series carton sealer is operator-fed and adjustable. It is designed to lay two strips of tape on the bottom and two strips of tape top of the carton. This becomes necessary where the major flaps do not meet in the middle of the carton, and the cost of staples is not acceptable. This series sealer eliminates all together the need for staples or glue on the bottom and the top of the carton. The sealer has four tape heads, with two side belts driven by two electric 110V UL approved motors. Our line incorporates our exclusive 2" or 3" pop-out pressure-sensitive "High Speed" tape heads with BestPack's patented tab adjustment. All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.




Key Points of the Carton Sealer



Operator Fed



Uniform Cartons



2 Top/2 Bottom Seal

Features

- Heavy duty 2mm welded frame including upper welded legs
- Side belt drive system with idler rollers behind the 1-piece die molded belts that also includes V-belt guide
- Lays two strips of tape on the bottom and two strips of tape on the top of the carton
- Accepts 2" and 3" Pop-out BestPack High Speed Tape Heads
- Upper Side Compression Unit
- Width and Height Adjustment Crank Handles can be Mounted on Either Side of the Sealer
- Electrical On/Off Box can also be Easily Mounted on Either Side of the Sealer (Left Side is Standard)
- Adjustable Bed Height for MS2B2T23: 20.5" to 30.0"
- Tape Roll Lengths: 1,000 yd., 1,500 yd., and 2,000 yd.

- Upper Mast is Tapped and Drilled that can be Raised (Un-bolted, Raised and Re-bolted) for an Extra 4" Carton Height if Needed
- Quality UL Approved Electrical Parts

Options

- Infeed/Exit Conveyor w/ L-Bracket Stabilizer
- Heavy Duty Dual Locking Casters
- 3-Flap Folder
- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Interlock Safety Gates
- Food Grade 304 Stainless Steel

Extra Accessories to Improve Efficiency




Spare Parts Kit



Locking Casters



Long Infeed/Exit Conveyor
w/ L-Bracket Holder/Stopper

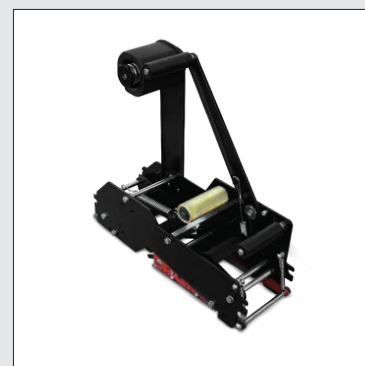

Spare Tape Head

- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Short Infeed/Exit Conveyor w/ L-Bracket Stabilizer
- 3-Flap Folder
- Carton Sealing Tape

Machine & Carton Specifications

110 Volts 60 Hz
Power Requirements

Up to 40 Cartons/min.
Speed

N/A
Air Requirements

435 lbs
Shipping Weight

Model	Machine Dimensions* Length x Width x Height	Carton Range Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.**	Shipping Weight (lbs.)
MS2B2T23-2 2" Tape Head	(39.5") x (36.0") x (68.0")	(6.0" - U) x (10.0" - 21.5") x (5.5" - 30.0")	(20.5" - 30.0")	Up to 40	435
MS2B2T23-3 3" Tape Head	(39.5") x (36.0") x (68.0")	(6.0" - U) x (10.0" - 21.5") x (5.5" - 30.0")	(20.5" - 30.0")	Up to 40	435

Information subject to change without notice.

Gap Range
Top Gap Width (3.22" - 6.5")
Bottom Gap Width (4.0" - 6.0")

All Models available in High Speed & Food Grade 304 Stainless Steel
* Outside Dimensions Only
** Based on 12" Long Carton