


CD12J/CD12SJ

Advanced Strap Dispensing Solutions for all Industries

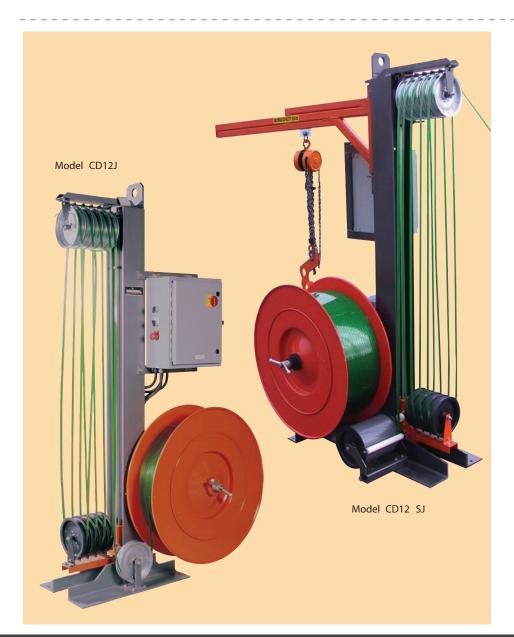

Advantages

- Standard or Super Jumbo Coil Capacity
- Large Capacity Tower
- Quick Take-Up Response
- Self Contained Controls for Independent Operation or Systems Integration
- "Out of Strap" Switch
- Minimal Space Requirements
- Linear Bearing Carriage Travel



CD12J/CD12 SJ

Advanced Strap Dispensing Solutions for all Industries

Standard Features

The Samuel CD12 series Dispensers have been designed to meet the demands of today's high performance polyester unitizing machines. The versatile drum on the CD 12J will hold multiplecoil sizes as a standard feature, and the CD 12 SJ will handle Super Jumbo polyester strapping coils with coil lengths upto 23,000 feet. An easy loading jib and c-hook attachment are optional on the CD 12SJ.

Specifications

	CD12J	CD12 SJ
Unit Height	90" (2310mm)	91" (2312mm)
Overall Width	28 1/8" (714mm)	39 1/2" (1003mm)
Overall Length	50.5" (1280mm)	74" (1880mm)
Voltage	110V, Single Phase	110V, Single Phase
Current	10 Amps	10 Amps
Max Coil Weight	160 lbs (72 kg)	350 lbs (159 kg)
Max Coil O.D.	32" (813mm)	32" (813mm)
Coil I.D.	16" (406mm) min / 24" (610mm) max	16" (406mm) min / 24" (610mm) max
Coil Face Width	6" (152mm) min / 7.5" (190mm) max	12"
Max Drum Speed at 60HZ	63 RPM	63 RPM
Recommended Jog Speed	21 RPM at 20HZ	21 RPM at 20HZ
Feed Rate at 32" O.D.	528 FPM (161 M/min)	528 FPM (161 M/min)
Feed Rate at 16" I.D.	264 FPM (80 M/min)	264 FPM (80 M/min)
Max Tower Capacity	37' 8" (11.5m)	37' 8" (11.5m)

Model CD12J Polyester Strapping Dispenser

